

PRODUCTS CATALOGUE 2021

www.skymesen.com



BUTCHERY

MEAT TENDERIZERS

AB MEAT TENDERIZER, STAINLESS STEEL, WITH SAFETY SYSTEM



VOLTAGE/PHASE	110 V/1 or 220V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	435x225x510 mm
NET WEIGHT	23,1 kg
GROSS WEIGHT	25 kg
AVERAGE PRODUCTION	400 kg/h
BEEF THICKNESS	13 mm



Accessory sold separately:
KES-AB/ABS 10
Meat strip cutter kit - AB/ABS 10 mm

ABS MEAT TENDERIZER, STAINLESS STEEL, WITH SAFETY SYSTEM



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	470x260x500 mm
NET WEIGHT	22 kg
GROSS WEIGHT	23,8 kg
AVERAGE PRODUCTION	400 kg/h
BEEF THICKNESS	13 mm



Accessory sold separately:
KES-AB/ABS 10
Meat strip cutter kit - AB/ABS 10 mm

ABSC MEAT STRIP CUTTER, STAINLESS STEEL, WITH SAFETY SYSTEM



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	435 x 225 x 510 mm
NET WEIGHT	23,1 kg
GROSS WEIGHT	25 kg
AVERAGE PRODUCTION	400 kg/h
BEEF THICKNESS	13 mm

ABS-HD MEAT TENDERIZER, STAINLESS STEEL, WITH SAFETY SYSTEM, HEAVY DUTY



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	465x245x530 mm
NET WEIGHT	27,1 kg
GROSS WEIGHT	29,5 kg
AVERAGE PRODUCTION	500 kg/h
BEEF THICKNESS	20 mm



Accessories sold separately:
KES-ABSHD10
Meat strip cutter kit - ABS-HD 10 mm
KES-ABSHD12
Meat strip cutter kit - ABS-HD 12 mm

ABN-HD MEAT TENDERIZER, STAINLESS STEEL, WITH SAFETY SYSTEM, HEAVY DUTY



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	540x475x240 mm
NET WEIGHT	25 kg
GROSS WEIGHT	28 kg
AVERAGE PRODUCTION	500 kg/h
BEEF THICKNESS	20 mm



Accessories sold separately:
KES-ABSHD10
Meat strip cutter kit - ABS-HD 10 mm
KES-ABSHD12
Meat strip cutter kit - ABS-HD 12 mm

MEAT SLICERS



FC-350
MEAT SLICER, STAINLESS STEEL,
BLADE 350 mm

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	525x750x760 mm
NET WEIGHT	49,7 kg
GROSS WEIGHT	65,5 kg
BEEF THICKNESS	Up to 40 mm

TABLE BAND SAWS

ML
TABLE BAND SAW, BLADE 1.740 mm / 68,5"

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	900x560x535 mm
NET WEIGHT	34 kg
GROSS WEIGHT	45,5 kg
CUTTING DIMENSIONS (HxW)	240x190 mm
CUTTING WIDTH	205 mm
BLADE WIDTH	5/8"
TABLE DIMENSIONS (WxD)	455x525 mm



MSL
TABLE BAND SAW, STAINLESS STEEL,
WITH CUT REGULATOR, BLADE 1.740 mm / 68,5"

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,75 HP
DIMENSIONS (HxWxD)	940x620x550 mm
NET WEIGHT	31 kg
GROSS WEIGHT	48 kg
CUTTING DIMENSIONS (HxW)	240x190 mm
CUTTING WIDTH	215 mm
BLADE WIDTH	5/8"
TABLE DIMENSIONS (WxD)	500x545 mm



MEAT MIXERS



MMS-501
MEAT MIXER WITH COVER, 50 kg

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	1.000x940x390 mm
NET WEIGHT	80 kg
GROSS WEIGHT	105 kg
TANK CAPACITY	50 kg
AVERAGE PRODUCTION	600 kg/h

MEAT GRINDERS WITH FIXED PROTECTION



PS-10
MEAT GRINDER 10, STAINLESS STEEL

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	1 HP
DIMENSIONS (HxWxD)	510x320x650 mm
NET WEIGHT	32 kg
GROSS WEIGHT	40 kg
AVERAGE PRODUCTION	200 kg/h

PS-22
MEAT GRINDER 22, STAINLESS STEEL



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2 HP
DIMENSIONS (HxWxD)	510x330x720 mm
NET WEIGHT	41 kg
GROSS WEIGHT	50 kg
AVERAGE PRODUCTION	300 kg/h

PSP-98M
MEAT GRINDER 98, STAINLESS STEEL



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2 HP
DIMENSIONS (HxWxD)	540x410x830 mm
NET WEIGHT	56,7 kg
GROSS WEIGHT	72,1 kg
AVERAGE PRODUCTION	450 kg/h

MEAT GRINDERS WITH FIXED PROTECTION AND STAINLESS STEEL MOUTH

PS-22
MEAT GRINDER 22, STAINLESS STEEL
WITH STAINLESS STEEL MOUTH



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2 HP
DIMENSIONS (HxWxD)	510x330x720 mm
NET WEIGHT	41 kg
GROSS WEIGHT	50 kg
AVERAGE PRODUCTION	300 kg/h

PSP-98M
MEAT GRINDER 98, STAINLESS STEEL
WITH STAINLESS STEEL MOUTH



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2 HP
DIMENSIONS (HxWxD)	540x410x830 mm
NET WEIGHT	56,7 kg
GROSS WEIGHT	72,1 kg
AVERAGE PRODUCTION	450 kg/h

MEAT MIXER-GRINDERS



HS-98
MEAT MIXER-GRINDER 98, STAINLESS
STEEL WITH STAINLESS STEEL MOUTH

VOLTAGE/PHASE	220 V/3 or 380 V/3
GRINDER MOTOR POWER	3 HP
MIXER MOTOR POWER	0,5 HP
FREQUENCY	50 Hz or 60 Hz
DIMENSIONS (HxWxD)	1.300x520x1.200 mm
NET WEIGHT	140 kg
GROSS WEIGHT	160 kg
BUCKET CAPACITY	up to 41 L or 31 kg
GRINDER ROTATION	212 rpm
AVERAGE PRODUCTION	900 kg/h

BAND SAWS



SF-218 / SL-218
BAND SAW, WITH CUT REGULATOR, BLADE
2.180 mm / 86"

MODEL	SF-218	SL-218
STRUCTURE	Painted	Stainless steel
VOLTAGE/PHASE	110 V/1 or 220 V/1	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60Hz
POWER RATING	1,5 HP	1,5 HP
DIMENSIONS (HxWxD)	1.540x630x645 mm	1.540x630x645 mm
NET WEIGHT	56 kg	56 kg
GROSS WEIGHT	75 kg	75 kg
BLADE WIDTH	5/8'	5/8'
CUTTING DIMENSIONS (HxW)	240x210 mm	230x210 mm
TABLE DIMENSIONS (WxD)	570x630 mm	570x630 mm



SKG
BAND SAW, WITH MOVABLE TABLE,
BLADE 3.150 mm / 124"

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2 HP
DIMENSIONS (HxWxD)	1.820x915x824 mm
NET WEIGHT	120 kg
GROSS WEIGHT	156 kg
CUTTING DIMENSIONS	430x390 mm
BLADE WIDTH	5/8"
TABLE DIMENSIONS (WxD)	790x820 mm



SF-282 / SL-282
BAND SAW, WITH MOVABLE TABLE,
CUT REGULATOR, BLADE 2.820 mm / 111"

MODEL	SF-282	SL-282
STRUCTURE	Painted	Stainless steel
VOLTAGE/PHASE	110 V/1 or 220 V/1	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60 Hz
POWER RATING	2HP	2HP
DIMENSIONS (HxWxD)	1.675x800x835 mm	1.675x800x835 mm
NET WEIGHT	75 kg	75 kg
GROSS WEIGHT	102 kg	102 kg
BLADE WIDTH	5/8'	5/8'
CUTTING DIMENSIONS	390x280 mm	390x280 mm
TABLE DIMENSIONS (WxD)	695x805 mm	695x805 mm



SFL-315HD
BAND SAW, STAINLESS STEEL,
WITH MOVABLE TABLE, CUT REGULATOR,
BLADE 3.150 mm / 124" HEAVY DUTY

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2 HP
DIMENSIONS (HxWxD)	2000 x 1000 x 1000 mm
NET WEIGHT	127 kg
GROSS WEIGHT	203 kg
CUTTING DIMENSIONS (HxW)	380x390 mm
BLADE WIDTH	3/4"
TABLE DIMENSIONS (WxD)	850x840 mm



SFL-282HD
BAND SAW, STAINLESS STEEL,
WITH MOVABLE TABLE, CUT REGULATOR,
BLADE 2.820 mm / 111" HEAVY DUTY

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2 HP
DIMENSIONS (HxWxD)	1.900x900x960 mm
NET WEIGHT	110 kg
GROSS WEIGHT	164 kg
CUTTING DIMENSIONS	350x330 mm
BLADE WIDTH	3/4"
TABLE DIMENSIONS (WxD)	865x800 mm



SI-315HD
BAND SAW, STAINLESS STEEL,
WITH MOVABLE TABLE, CUT REGULATOR,
BLADE 3.150 mm / 124" HEAVY DUTY

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2 HP
DIMENSIONS (HxWxD)	1.900x915x990 mm
NET WEIGHT	136 kg
GROSS WEIGHT	190 kg
CUTTING DIMENSIONS (HxW)	345x390 mm
BLADE WIDTH	3/4"
TABLE DIMENSIONS (WxD)	800x820 mm



SLICER

SEMI AUTOMATIC SLICERS

CFI-300L-N
SLICER, STAINLESS STEEL, BLADE 300 mm



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,33 HP
DIMENSIONS (HxWxD)	440x560x570 mm
NET WEIGHT	27 kg
GROSS WEIGHT	40 kg
CUT THICKNESS	Up to 15 mm
SLICES PER MINUTE	Variable

AUTOMATIC SLICERS

CA-300L
SLICER, STAINLESS STEEL, BLADE 300 mm



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,33 HP
DIMENSIONS (HxWxD)	610x640x700 mm
NET WEIGHT	47,2 kg
GROSS WEIGHT	68,2 kg
CUT THICKNESS	up to 3 mm
SLICES PER MINUTE	48



BAR AND RESTAURANT

CUTTERS



CR-4L / CR-8L CUTTER, STAINLESS STEEL, WITH SAFETY SYSTEM, 4/8 LITERS

MODEL	CR-4L	CR-8L
VOLTAGE/PHASE	110 V/1 or 220 V/1	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60 Hz
POWER RATING	0,5 HP	1 HP
DIMENSIONS (HxWxD)	460x265x290 mm	530x310x310 mm
NET WEIGHT	14,3 kg	17,3 kg
GROSS WEIGHT	15,3 kg	19 kg
NOMINAL BOWL CAPACITY	4 L	8 L



Accessories sold separately:
LDF-4L
 Cooked meat shredding blade
LDF-8L
 Cooked meat shredding blade



DB-06 POTATO PEELER, STAINLESS STEEL, 6 kg

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	630x390x390 mm
NET WEIGHT	18 kg
GROSS WEIGHT	20,8 kg
AVERAGE PRODUCTION	120 kg/h
CAPACITY	6 kg



DB-10 POTATO PEELER, WITH DOOR, STAINLESS STEEL, 10 kg

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	720x475x580 mm
NET WEIGHT	24,2 kg
GROSS WEIGHT	27,6 kg
AVERAGE PRODUCTION	200 kg/h
CAPACITY	10 kg



DB-25HD POTATO PEELER, WITH DOOR AND TIMER, STAINLESS STEEL, 25 kg, HEAVY DUTY

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	1 HP
DIMENSIONS (HxWxD)	1155x550x670 mm
NET WEIGHT	45 kg
GROSS WEIGHT	64 kg
AVERAGE PRODUCTION	Up to 500 kg/h
CAPACITY	25 kg



Accessory sold separately:
CC-25HD
 Peel Strainer Box

PEELERS



DA-06 GARLIC PEELER, STAINLESS STEEL, 4 kg

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	585x490x390 mm
NET WEIGHT	20,7 kg
GROSS WEIGHT	22,5 kg
AVERAGE PRODUCTION	70 kg/h
CAPACITY	4 kg



DAL-06S GARLIC PEELER, STAINLESS STEEL, 4 kg

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	639x390x390 mm
NET WEIGHT	18,2 kg
GROSS WEIGHT	21 kg
AVERAGE PRODUCTION	70 kg/h
CAPACITY	4 kg



DC-06 ONION PEELER, STAINLESS STEEL, 6 kg

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	595x490x390 mm
NET WEIGHT	20,7 kg
GROSS WEIGHT	22,5 kg
AVERAGE PRODUCTION	120 kg/h
CAPACITY	6 kg

CITRUS JUICERS



EX CITRUS JUICER, STAINLESS STEEL, ALUMINUM LIQUID CHAMBER

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	0,25 HP
DIMENSIONS (HxWxD)	425x245x210 mm
NET WEIGHT	4 kg
GROSS WEIGHT	5 kg
ROTATION	1.750 rpm



EX SUPER CITRUS JUICER, STAINLESS STEEL, ALUMINUM LIQUID CHAMBER

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	425x245x210 mm
NET WEIGHT	6 kg
GROSS WEIGHT	7 kg
ROTATION	1.750 rpm



ESB-N
CITRUS JUICER, STAINLESS STEEL,
STAINLESS STEEL LIQUID CHAMBER

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	0,25 HP
DIMENSIONS (HxWxD)	440x360x270 mm
NET WEIGHT	5,4 kg
GROSS WEIGHT	6,4 kg
ROTATION	1.750 rpm



ESB-SUPER-N
CITRUS JUICER, STAINLESS STEEL,
STAINLESS STEEL LIQUID CHAMBER

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	440x360x270 mm
NET WEIGHT	10,3 kg
GROSS WEIGHT	11,3 kg
ROTATION	1.750 rpm

CENTRIFUGAL JUICE EXTRACTORS



CSE
CENTRIFUGAL JUICE EXTRACTOR,
STAINLESS STEEL, WITH SAFETY SYSTEM

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	670x560x300 mm
NET WEIGHT	15,5 kg
GROSS WEIGHT	17 kg
SPEED	3.500 rpm

ELECTRIC FRYERS OIL



FE-10-N
ELECTRIC FRYER, 5 LITERS, STAINLESS STEEL

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	110 V - 2.000 W 220 V - 2.500 W
DIMENSIONS (HxWxD)	280x300x670 mm
NET WEIGHT	4 kg
GROSS WEIGHT	5 kg
TANK CAPACITY	1x5 L



FED-20-N
ELECTRIC FRYER, TWO 5 LITERS TANKS,
STAINLESS STEEL

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	110 V - 2x2.000 W 220 V - 2x2.500 W
DIMENSIONS (HxWxD)	280x610x670 mm
NET WEIGHT	7,8 kg
GROSS WEIGHT	9,8 kg
TANK CAPACITY	2x5 L

ELECTRIC FRYERS COLD ZONE

FCZ-N / FCZR-N
ELECTRIC FRYER COLD ZONE, 18 LITERS,
STAINLESS STEEL / TURBO ELECTRIC FRYER COLD
ZONE, 18 LITERS, STAINLESS STEEL

MODEL	FCZ-N	FCZR-N
VOLTAGE/PHASE	220 V/1	220 V/1
FREQUENCY	50 Hz - 60 Hz	50 Hz - 60 Hz
POWER RATING	5.000 W	8.000 W
DIMENSIONS (HxWxD)	1.210x500x770 mm	1.200x500x770 mm
NET WEIGHT	14,8 kg	20 kg
GROSS WEIGHT	18 kg	23,3 kg
TANK CAPACITY	18 L	18 L
MAX.OIL TEMPERATURE	200 °C	200 °C



GAS FRYERS COLD ZONE

FG20 GLP / FG20 GN
GAS FRYER COLD ZONE, 20 LITERS, STAINLESS STEEL, LPG/NG

MODEL	FG20 LPG	FG20 NG
DIMENSIONS (HxWxD)	1.130x400x770 mm	1.130x400x770 mm
NET WEIGHT	40 kg	40 kg
GROSS WEIGHT	55 kg	55 kg
TYPE OF GAS	LPG	NG
CAPACITY	19,5 L	19,5 L
QUANTITY OF BURNERS	3	3
POWER BY BURNER	30.000 BTU/h	34.000 BTU/h
TOTAL POWER	90.000 BTU/h	90.000 BTU/h
WORKING PRESSURE	0,361 psi 0,025 kgf/cm ²	0,180 psi 0,013 kgf/cm ²
CONSUMPTION BY BURNER	0,52 kg/h	0,66 kg/h
TOTAL CONSUMPTION	1,57 kg/h	1,99 kg/h



Accessory sold separately:
CR16x32CCR
Fryer basket 16x32 cm with coated handle



GAS GRIDDLES



CG24 / CG36
STAINLESS STEEL GAS GRIDDLE WITH SALAMANDER

MODEL	CG24	CG36
DIMENSIONS (HxWxD)	310x590x810 mm	310x880x810 mm
NET WEIGHT	60 kg	80 kg
GROSS WEIGHT	75 kg	95 kg
TYPE OF GAS	LPG or NG	LPG or NG
QTY OF BURNERS	2	3
POWER BY BURNER	LPG	27.000 BTU/h
	NG	30.600 BTU/h
TOTAL POWER	LPG	54.000 BTU/h
	NG	61.200 BTU/h
WORKING PRESSURE	LPG	0,361 psi 0,025 kgf/cm ²
	NG	0,180 psi 0,013 kgf/cm ²
CONSUMPTION BY BURNER	LPG	0,86 kg/h
	NG	1,08 m ³ /h
TOTAL CONSUMPTION	LPG	1,73 kg/h
	NG	2,16 m ³ /h

GAS CHARBROILERS



CBG 24 / CBG36

STAINLESS STEEL GAS CHARBROILER

MODEL	CBG 24	CBG36
DIMENSIONS (HxWxD)	310x590x810 mm	310x880x810 mm
NET WEIGHT	60 kg	77 kg
GROSS WEIGHT	75 kg	92 kg
TYPE OF GAS	LPG or NG	LPG or NG
QTY OF BURNERS	2	3
POWER BY BURNER	LPG	27.000 BTU/h
	NG	30.600 BTU/h
TOTAL POWER	LPG	54.000 BTU/h
	NG	61.200 BTU/h
WORKING PRESSURE	LPG	0,361 psi 0,025 kgf/cm ²
	NG	0,180 psi 0,013 kgf/cm ²
CONSUMPTION BY BURNER	LPG	0,86 kg/h
	NG	1,08 m ³ /h
TOTAL CONSUMPTION	LPG	1,73 kg/h
	NG	2,16 m ³ /h

GAS STOVES



FOG24 / FOG36

STAINLESS STEEL COUNTERTOP STOVE, WITH 4/6 BURNERS

MODEL	FOG24	FOG36
DIMENSIONS (HxWxD)	310x590x810 mm	310x900x810 mm
NET WEIGHT	58 kg	82 kg
GROSS WEIGHT	73 kg	97 kg
TYPE OF GAS	LPG o NG	LPG o NG
QTY OF BURNERS	4	6
POWER BY BURNER	LPG	30.000 BTU/h
	NG	34.000 BTU/h
TOTAL POWER	LPG	12.000 BTU/h
	NG	136.000 BTU/h
WORKING PRESSURE	LPG	0,361 psi 0,025 kgf/cm ²
	NG	0,180 psi 0,013 kgf/cm ²
CONSUMPTION BY BURNER	LPG	0,36 kg/h
	NG	0,45 m ³ /h
TOTAL CONSUMPTION	LPG	1,44 kg/h
	NG	1,80 m ³ /h

HIGH SPEED BLENDERS 1,5 LITERS



LI1.5

HIGH SPEED BLENDER, STAINLESS STEEL, STAINLESS STEEL CUP, 1,5 LITERS

VOLTAGE/PHASE	110 V / 1 or 220 V / 1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	900 W
DIMENSIONS (HxWxD)	405x210x190 mm
NET WEIGHT	1,92 kg
GROSS WEIGHT	2,5 kg
ROTATION	18.000 rpm

HIGH SPEED BLENDERS 2,0 LITERS



LI2

HIGH SPEED BLENDER, STAINLESS STEEL, STAINLESS STEEL CUP, 2,0 LITERS

VOLTAGE/PHASE	110 V / 1 or 220 V / 1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	900 W
DIMENSIONS (HxWxD)	420x200x190 mm
NET WEIGHT	2,17 kg
GROSS WEIGHT	2,83 kg
ROTATION	18.000 rpm



TA2

HIGH SPEED BLENDER, STAINLESS STEEL, STAINLESS STEEL CUP, 2,0 LITERS

VOLTAGE/PHASE	110 V / 1 or 220 V / 1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	1.000 W
DIMENSIONS (HxWxD)	450x215x205 mm
NET WEIGHT	2,5 kg
GROSS WEIGHT	3,22 kg
ROTATION	22.000 rpm



BM2

MAXI BLENDER, HIGH SPEED, TRITAN CUP, WITH VARIABLE SPEED, 2,0 LITERS

VOLTAGE/PHASE	110 V / 1 or 220 V / 1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	2.238 W
DIMENSIONS (HxWxD)	505x205x230 mm
NET WEIGHT	4,15 kg
GROSS WEIGHT	5,15 kg
ROTATION	38.000 rpm



Accessory sold separately:

CCBF2

Complete jar BPA free 2L, without mixing rod

HIGH SPEED BLENDERS 4,0 LITERS



BS2
SUPREME BLENDER, HIGH SPEED, TRITAN CUP, WITH PRE-PROGRAMMED FUNCTIONS, 2,0 LITERS

VOLTAGE/PHASE	110 V / 1 or 220 V / 1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	2.238 W
DIMENSIONS (HxWxD)	505 x 205 x 230 mm
NET WEIGHT	4,28 kg
GROSS WEIGHT	5,25 kg
ROTATION	38.000 rpm



Accessory sold separately:
CCBF2
Complete jar BPA free 2L, without mixing rod



TA-04MB-N
HIGH SPEED BLENDER, STAINLESS STEEL, STAINLESS STEEL SEAMLESS CUP, 4,0 LITERS

VOLTAGE/PHASE	110 V / 1 or 220 V / 1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	1200 W
DIMENSIONS (HxWxD)	700 x 270 x 240 mm
NET WEIGHT	5,3 kg
GROSS WEIGHT	6,8 kg
ROTATION	22000 rpm

COMMERCIAL BLENDERS

LC2 / LC3 / LC4 / LC6 / LC8 / LC10

COMMERCIAL BLENDER, STAINLESS STEEL, STAINLESS STEEL SEAMLESS CUP 2 / 3 / 4 / 6 / 8 / 10 LITERS

MODEL	LC2	LC3	LC4	LC6	LC8	LC10
VOLTAGE/PHASE	110 V/1 or 220 V/1	110 V/1 or 220 V/1	110 V/1 or 220 V/1	110 V/1 or 220 V/1	110 V/1 or 220 V/1	110 V/1 or 220 V/1
FREQUENCY	50 Hz - 60 Hz	50 Hz - 60 Hz	50 Hz - 60 Hz	50 Hz - 60 Hz	50 Hz - 60 Hz	50 Hz - 60 Hz
POWER RATING	0,5 HP	0,5 HP	0,5 HP	0,5 HP	0,5 HP	0,5 HP
DIMENSIONS (HxWxD)	660x240x255 mm	660x240x255 mm	660x290x280 mm	720x310x300 mm	750x330x320 mm	780x340x330 mm
NET WEIGHT	4,3 kg	4,5 kg	5 kg	5,25 kg	5,3 kg	5,5 kg
GROSS WEIGHT	5,3 kg	5,4 kg	5,9 kg	6,15 kg	6,5 kg	6,8 kg
ROTATION	4.500 rpm	4.500 rpm	4.500 rpm	4.500 rpm	4.500 rpm	4.500 rpm
CUP CAPACITY	2 L	3,6 L	4 L	6 L	8 L	10 L



COMMERCIAL BLENDERS WITH REMOVABLE CUTTING UNIT

LAR-02MB / LAR-04MB / LAR-06MB / LAR-08MB / LAR-10MB

COMMERCIAL BLENDER, STAINLESS STEEL, STAINLESS STEEL SEAMLESS CUP 2 / 4 / 6 / 8 / 10 LITERS

MODEL	LAR-02MB	LAR-04MB	LAR-06MB	LAR-08MB	LAR-10MB
VOLTAGE/PHASE	110 V/1 or 220 V/1	110 V/1 or 220 V/1	110 V/1 or 220 V/1	110 V/1 or 220 V/1	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60 Hz	50 Hz or 60 Hz	50 Hz or 60 Hz	50 Hz or 60 Hz
POWER RATING	0,5 HP	0,5 HP	0,5 HP	0,5 HP	0,5 HP
DIMENSIONS (HxWxD)	640x240x270 mm	630x275x260 mm	720x310x300 mm	750x330x320 mm	780x340x330 mm
NET WEIGHT	8,2 kg	8,7 kg	8,9 kg	9,9 kg	10,3 kg
GROSS WEIGHT	9,2 kg	9,8 kg	10 kg	11,1 kg	11,6 kg
ROTATION	3.500 rpm	3.500 rpm	3.500 rpm	3.500 rpm	3.500 rpm
CUP CAPACITY	2 L	4 L	6 L	8 L	10 L



COMMERCIAL TILTING BLENDERS WITH REMOVABLE CUTTING UNIT

LAR-15PMB / LAR-25PMB
COMMERCIAL TILTING BLENDER, STAINLESS STEEL SEAMLESS CUP 15 / 25 LITERS

MODEL	LAR-15PMB	LAR-25PMB
VOLTAGE/PHASE	110 V/1 or 220 V/1	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60 Hz
POWER RATING	1,5 HP	1,5 HP
DIMENSIONS (HxWxD)	1.080x360x525 mm	1.180x410x525 mm
NET WEIGHT	19 kg	20,5 kg
GROSS WEIGHT	21,6 kg	23,5 kg
ROTATION	3.500 rpm	3.500 rpm
CUP CAPACITY	15 L	25 L



COMMERCIAL TILTING BLENDERS WITH STAINLESS STEEL STAND AND REMOVABLE CUTTING UNIT

LAR-15LMB / LAR-25LMB
COMMERCIAL TILTING BLENDER, STAINLESS STEEL STAND AND SEAMLESS CUP 15 / 25 LITERS

MODEL	LAR-15LMB	LAR-25LMB
VOLTAGE/PHASE	110 V/1 or 220 V/1	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60 Hz
POWER RATING	1,5 HP	1,5 HP
DIMENSIONS (HxWxD)	1.080x360x525 mm	1.180x410x525 mm
NET WEIGHT	19 kg	20,5 kg
GROSS WEIGHT	21,6 kg	23,5 kg
ROTATION	3.500 rpm	3.500 rpm
CUP CAPACITY	15 L	25 L



FOOD PROCESSORS



PA-7
FOOD PROCESSOR, STAINLESS STEEL,
WITH 7 DISCS DIAMETER 203 mm

VOLTAGE/PHASE	110 V/1 or 220 V / 1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	520x290x520 mm
NET WEIGHT	25,1 kg
GROSS WEIGHT	28,6 kg
AVERAGE PRODUCTION	250 kg/h
ROUND FEEDING MOUTH	ø 48mm
OBLONG FEEDING MOUTH	188 x 173 mm

PAIE
FOOD PROCESSOR, STAINLESS STEEL,
WITH SAFETY SYSTEM (DISC DIAMETER 203 mm)



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	440x250x590 mm
NET WEIGHT	22,3 kg
GROSS WEIGHT	25,5 kg
AVERAGE PRODUCTION	350 kg/h
ROUND FEEDING MOUTH	ø 52 mm
OBLONG FEEDING MOUTH	71x146 mm



PA-14-N
FOOD PROCESSOR, WITH 6 DISCS
DIAMETER 429 mm

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	1 HP
DIMENSIONS (HxWxD)	700x530x660 mm
NET WEIGHT	71,5 kg
GROSS WEIGHT	99 kg
AVERAGE PRODUCTION	400 kg/h
BIG ROUND FEEDING MOUTH	ø 152 mm

FOOD PROCESSORS DISCS

USAGE INDICATION


▲ PA-7 ● PA-14-N ■ PAIE

Check below disks availability for each processor. Be aware, some discs are not interchangeable between different processor models.


SLICER



JULIENNE

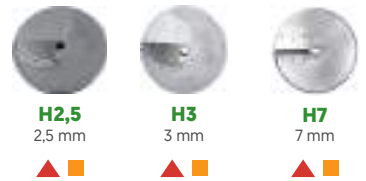

GRATER

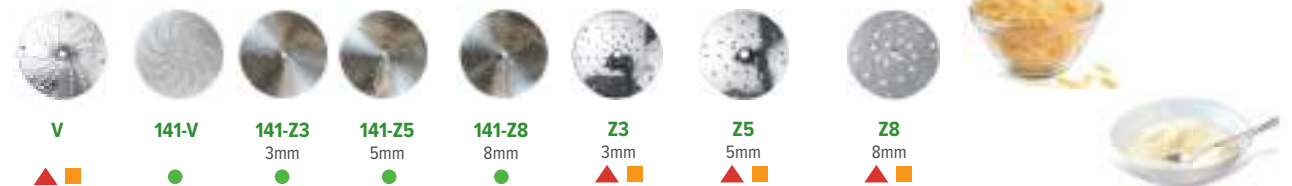

DICING




Combined with disc **E10** or **H7** or **EH7**

FRENCH FRY DISC




Combined with disc **E10**

SERRATED SLICER

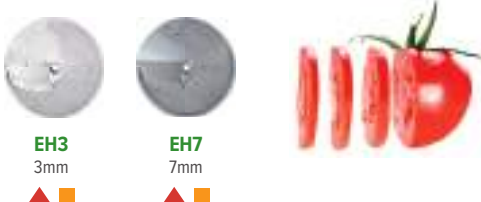

SCALLOP CUT

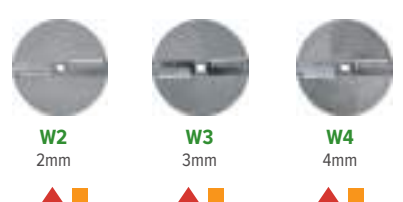

GRATERS

RQC

CHEESE AND COCONUT GRATER, STAINLESS STEEL, WITH 3 DISCS



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	420x200x570 mm
NET WEIGHT	15,5 kg
GROSS WEIGHT	17 kg

TG

ICE CRUSHER



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	420x200x570 mm
NET WEIGHT	15,5 kg
GROSS WEIGHT	17 kg

FBC

GREEN BANANA CHIPS SLICER



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	400x200x435 mm
NET WEIGHT	14,5 kg
GROSS WEIGHT	16 kg

DOUGH OPENERS



PROUD WINNER
HOST 2018 AND 2017
SMART LABEL

AMP-400 / AMP-500

DOUGHBALL OPENER, FLATTNER AND FORMER

MODEL	AMP-400	AMP-500
VOLTAGE/PHASE	110 V/1 or 220 V/1	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60 Hz
POWER RATING	0,5 HP	0,5 HP
CONSUMPTION	0,40 kW-h	0,40 kW-h
DIMENSIONS (HxWxD)	760x705x590 mm	835x780x650 mm
NET WEIGHT	68,3 kg	100 kg
GROSS WEIGHT	89,5 kg	132 kg
AVERAGE PRODUCTION	180 pizzas per hour	180 pizzas per hour

Included	AMP-400	AMP-500
Tray #1	Flat tray	Flat tray and edge shaping groove 40 cm (16")
Tray #2	Tray edge shaping grooves 25 cm (10") and 35 cm (14")	Tray edge shaping grooves 30 cm (12") and 45 cm (18")
Tray #3	Tray edge shaping grooves 30 cm (12") and 40 cm (16")	Tray edge shaping grooves 35 cm (14") and 50 cm (20")

Separately sold trays for AMP-400

4BBN25/35	Neapolitan tray edge shaping grooves 25 cm (10") and 35 cm (14")
4BBN30/40	Neapolitan tray edge shaping grooves 30 cm (12") and 40 cm (16")

Separately sold trays for AMP-500

5BLB37	Flat tray and edge shaping groove 37 cm (15")
5BLBN40	Neapolitan flat tray and edge shaping groove 40 cm (16")
5BBN30/45	Neapolitan tray edge shaping grooves 30 cm (12") and 45 cm (18")
5BBN35/50	Neapolitan tray edge shaping grooves 35 cm (14") and 50 cm (20")

STONE DECK OVENS

FLP-400A

ELECTRIC STONE DECK PIZZA OVEN, ANALOGIC



VOLTAGE/PHASE	220 V / 1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	3300 W
DIMENSIONS (HxWxD)	310 x 700 x 710mm
NET WEIGHT	38 kg
GROSS WEIGHT	41 kg
AVERAGE PRODUCTION	1 baked pizza in 3 min
DIÁMETRO DE LA PIZZA	40 cm

FLP-400D

ELECTRIC STONE DECK PIZZA OVEN, DIGITAL



VOLTAGE/PHASE	220 V/1
FREQUENCY	50 - 60Hz
POWER RATING	3.300 W
DIMENSIONS (HxWxD)	310x700x710 mm
NET WEIGHT	38 kg
GROSS WEIGHT	41 kg
AVERAGE PRODUCTION	1 baked pizza in 3 min
DIÁMETRO DE LA PIZZA	40 cm



ICE CREAM PARLOR

MILKSHAKE MIXERS



FRONT

SIDE

BMS

MILKSHAKE MIXER, STAINLESS STEEL CUP, 1 MIXER

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz - 60Hz
POWER RATING	500 W
DIMENSIONS (HxWxD)	470x210x150 mm
NET WEIGHT	3,8 kg
GROSS WEIGHT	4,4 kg
CUP CAPACITY	800 ml
ROTATION	15.000 rpm



BAKERY


PLANETARY MIXERS



BPS-06

PLANETARY MIXER, MULTIPLE SPEEDS, 6 LITERS

Available colors



VOLTAGE/PHASE	110 V/1 - 220 V/1
FREQUENCY	50 Hz - 60 Hz
POWER RATING	500 W
DIMENSIONS (HxWxD)	420x230x380 mm
NET WEIGHT	12,6 kg
GROSS WEIGHT	14 kg
MAXIMUM ROTATION	260 rpm

DOUGH ROLLERS

CLM-300L

TABLE LAMINATING DOUGH ROLLER, STAINLESS STEEL, ROLLS OF 300MM, STANDARD



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	520x500x560 mm
NET WEIGHT	43,5 kg
GROSS WEIGHT	57 kg
DOUGH PORTION	Up to 3kg

CLM-400

TABLE LAMINATING DOUGH ROLLER, STAINLESS STEEL, ROLLS OF 400 mm



VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	1 HP
DIMENSIONS (HxWxD)	650x600x800mm
NET WEIGHT	67,2 kg
GROSS WEIGHT	85 kg
DOUGH PORTION	Up to 5kg

BREAD CRUMB MILLS



MPAL

BREAD CRUMBS MILL, STAINLESS STEEL WITH REMOVABLE CUP

VOLTAGE/PHASE	110 V/1 or 220 V/1
FREQUENCY	50 Hz or 60 Hz
POWER RATING	0,5 HP
DIMENSIONS (HxWxD)	760x310x315mm
NET WEIGHT	10 kg
GROSS WEIGHT	11,3 kg
AVERAGE PRODUCTION	30 kg/h

CONVECTION TURBO OVENS, ELECTRICAL, 4 TRAYS 40x60 cm



DISCOVERY 4 / DISCOVERY 4C / DISCOVERY 4E

TURBO OVEN, ELECTRICAL, 4 TRAYS

MODEL	DISCOVERY 4	DISCOVERY 4C	DISCOVERY 4E
	WITHOUT FERMENTATION CHAMBER	WITH STAND	WITH FERMENTATION CHAMBER
VOLTAGE/PHASE	220 V/2 or 380 V/3	220 V/2 or 380 V/3	220 V/2 or 380 V/3
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60 Hz	50 Hz or 60 Hz
POWER RATING	0,5 HP	0,5 HP	0,5 HP
DIMENSIONS (HxWxD)	750x1030x980 mm	1650x1030x980 mm	1700x1030x980 mm
NOMINAL POWER	7 kW	7 kW	8 kW
CONSUMPTION	1,44 kW-h	1,44 kW-h	1,74 kW-h
THREE-PHASE CIRCUIT BREAKER	220 V 40 A	220 V 40 A	380 V 20 A
INLET WATER PRESSURE	2 to 6 mH ₂ O	2 to 6 mH ₂ O	2 to 6 mH ₂ O
NET WEIGHT	110 kg	130 kg	160 kg
INSTALLATION	4 mm ² AC 220 V / 2,5 mm ² AC 380 V	4 mm ² AC 220 V / 2,5 mm ² AC 380 V	4 mm ² AC 220 V / 2,5 mm ² AC 380 V

LOAD CAPACITY PER PROCESS

04 Trays 40 x 60 cm with 5 Waves	80 Breads with 50g Each
04 Trays 40 x 60 cm with 4 Waves	64 Breads with 50g Each
04 Trays 40 x 60 cm with 5 Waves	100 Breads with 50g Each

CONVECTION TURBO OVENS, ELECTRICAL, 10 TRAYS 60x70 cm

DISCOVERY 10

TURBO OVEN, ELECTRICAL, 10 TRAYS, 360 BREADS



VOLTAGE/PHASE	220 V/3 or 380 V/3
FREQUENCY	50 Hz or 60 Hz
POWER RATING	2x0,75 HP
DIMENSIONS (HxWxD)	1.900x1070x1490 mm
NOMINAL POWER	20 kW
AMPERAGE	65 A/220 V or 37,8 A/380 V
THREE-PHASE CIRCUIT BREAKER	220 V-70 A / 380 V-40 A
INLET WATER PRESSURE	2 to 6 mH ₂ O
NET/GROSS WEIGHT	250 kg
INSTALLATION	6 mm ² AC 380 V / 10mm ² AC 220 V
MAXIMUM TEMPERATURE	250°C

DOUGH DIVIDERS

DMS-30

DOUGH DIVIDER

DIMENSIONS (HxWxD)	1.100x450x430 mm
NET WEIGHT	33 kg
GROSS WEIGHT	54 kg
TRAY CAPACITY	1,8 kg
PORCIONES	30 units



CONVECTION TURBO OVENS, ELECTRICAL, WITH 4 TRAYS 35x35 cm



MAXICONV

ELECTRIC CONVECTION TURBO OVEN, COMPACT, WITH 4 TRAYS 35x35 cm

MODEL	MAXICONV SV	MAXICONV VP
VOLTAGE/PHASE	220 V	220 V
FREQUENCY	50 Hz or 60 Hz	50 Hz or 60 Hz
POWER RATING	1/30 HP	1/30 HP
NOMINAL POWER	3 kW	3 kW
HEIGHT	440x600x710 mm	440x600x710 mm
NET WEIGHT	29 kg	29 kg
GROSS WEIGHT	32 kg	32 kg
AVERAGE PRODUCTION	48 breads (50g)	48 breads (50g)
MAXIMUM TEMPERATURE	210° C	210° C

Skymssen In Skymssen you can trust.

Metalúrgica Skymssen Ltda.

Rodovia Ivo Silveira, 9525
Volta Grande
88355-202, Brusque / SC

www.skymssen.com



Follow us:

